
S3S-LCM Recovery Unit

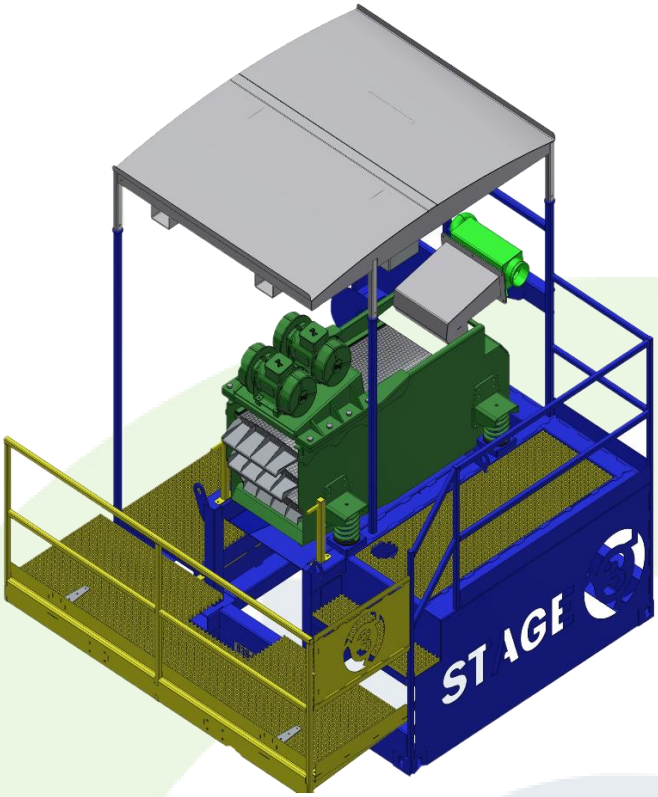

Features

- Triple or Quadruple unit set up
- Independent VFD controlled pumps
- Recovers LCM, Beads and other particle specific material
- Series and Parallel operations
    - Flowrate dependent options
- Bladder/air tensioned screens for safe and easy removal

Technical Specifications

- Flowrate: 20 – 150 gal/min/unit
- G-Force: 4 – 5 G's/unit
- Weight: 8,300 lbs/unit
- Riser Skid Dimensions: 20' (L) x 8' (W) x 8' (H)
    - Used for screen and tool storage
    - Allows for effluent, gravity flow of up to 10'

Electrical Requirements

- Voltage: 480 VAC, 60 Hz, 3P
- Amperage: 14 Amps
- Connector Type: Appleton ACP3044